

# **Ahsay Online Backup Suite v5.1**

## **Brick-Level Exchange Backup**

Version 5.1.0.5

May 2006

## Table of Content

1	Introduction.....	3
2	How To - Backup Individual Emails .....	3
2.1	<b>Granting Full Mailbox Access Privileges.....</b>	<b>3</b>
2.1.1	For one specific mailbox .....	3
2.1.2	For mailboxes located within a specific mailbox store .....	4
2.1.3	For mailboxes located within a specific server .....	4
2.2	Creating an Exchange Mail Backup Set .....	4
2.3	Backup Emails.....	8
2.4	Restore Emails.....	9
3	Work In Progress .....	13
4	References.....	13

## 1 Introduction

In today's business world, email is a mission critical application. Email is so crucial to every modern company that downtime or lost emails causes lost of productivity and or business. With this in mind, Ahsay has developed the "Brick-Level Exchange Backup Agent" to complement our existing "Exchange Backup Agent" to provide full exchange server protection with the unique ability to quickly recover lost information without restoring the whole exchange information store.

Ahsay's brick level backup was not designed to fully protect an Exchange server, but to facilitate easy backup and fast restore of individual mailboxes. Ahsay's brick level restore cannot be used to fully recover the Information Store after a disaster. If used, a brick level backup must be utilized in conjunction with full Information Store Backup, in order to fully protect the exchange server.

## 2 How To - Backup Individual Emails

### 2.1 Granting Full Mailbox Access Privileges

Ahsay "Brick-Level Exchange Backup" requires "Full Mailbox Access" permission for the user running OBM on the exchange machine. Please follow one of the instructions below to grant the required access.

#### 2.1.1 For one specific mailbox

Use the following procedure to grant access to Exchange 2000 or an Exchange 2003 mailbox:

- a) Start Active Directory Users and Computers.
- b) On the View menu, ensure that the Advanced Features check box is selected.
- c) Right-click the user whose mailbox you want to give permissions to and choose Properties.
- d) On the Exchange Advanced tab, click Mailbox Rights.
- e) Notice that the Domain Admins and Enterprise Admins have both been given Deny access to Full Mailbox access.
- f) Click Add, click the user or group who you want to have access to this mailbox, and then click OK.

- g) Be sure that the user or group is selected in the Name box.
- h) In the Permissions list, click Allow next to Full Mailbox Access, and then click OK.
- i) Click Ok all the way out.
- j) Restart the Microsoft Exchange Information Store.

### **2.1.2 For mailboxes located within a specific mailbox store**

Use the following procedure to grant access to Exchange 2000 or an Exchange 2003 mailbox found on a specific mailbox store:

- a) Start Exchange System Manager.
- b) Drill down to your server object within the appropriate Administrative Group. Expand the server object and find the required mailbox store within the appropriate Storage Group. Right-click it and choose Properties.
- c) In the Properties window go to the Security tab.
- d) Click Add, click the user or group who you want to have access to the mailboxes, and then click OK.
- e) Be sure that the user or group is selected in the Name box.
- f) In the Permissions list, click Allow next to Full Control, and then click OK.
- g) Click 'Apply' and 'OK'
- h) Restart the Microsoft Exchange Information Store.

### **2.1.3 For mailboxes located within a specific server**

- a) Start Exchange System Manager.
- b) Drill down to your server object within the appropriate Administrative Group. Right-click it and choose Properties.
- c) In the Properties window go to the Security tab.
- d) Click Add, click the user or group who you want to have access to the mailboxes, and then click OK.
- e) Be sure that the user or group is selected in the Name box.
- f) In the Permissions list, click Allow next to Full Control, and then click OK.
- g) Click Ok all the way out.
- h) Restart the Microsoft Exchange Information Store.

## **2.2 Creating a MS Exchange Mail Backup Set**

A MS Exchange Mail Backup Set can be created as follows:-

- a) Select Backup Set > New > MS Exchange Mail Backup Set. Change the name as appropriate and click [Next] button.

**Add new MS Exchange Backup Set**

Backup Set

Please type a name for this Backup Set.

Name: MSEXchangeMailBackupSet-1

Type: Microsoft Exchange Mail Backup

Cancel < Previous Next >

- b) Notice that the root node is the exchange server address (in this case ahsay.com.local). Below the root node is the “MBX” and “Public Folders” nodes.

**Add new MS Exchange Backup Set**


Backup Source

Please select Database to be backed up.


Name	From / To	Subject	Receive...
ahsay.com.local			
MBX			
Public Folders			

Cancel < Previous Next >


- c) Expand the “MBX” node to display the list of Email Accounts for this exchange server.

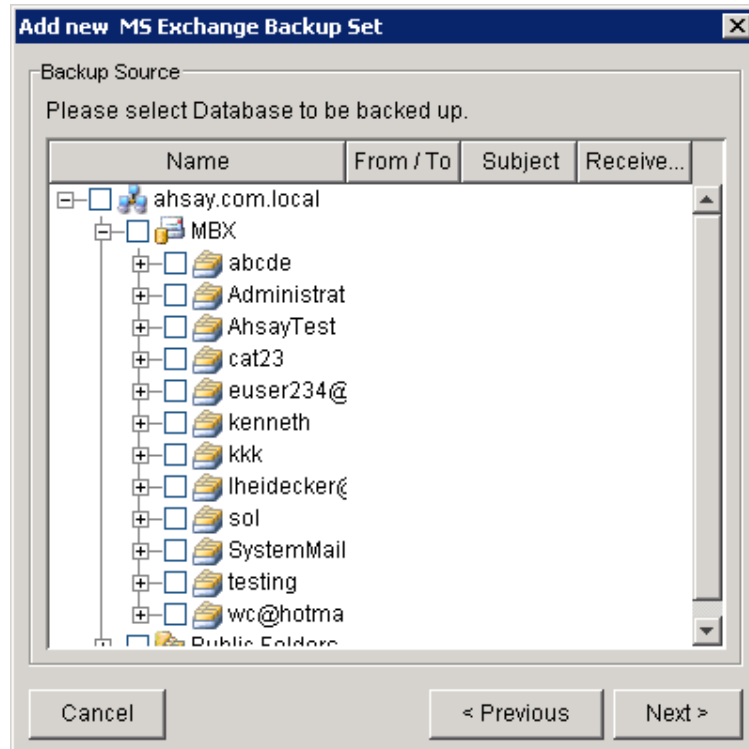

- d) Choose a mailbox, for example expand the “AhsayTest” mailbox to display all the folders available under this mailbox.

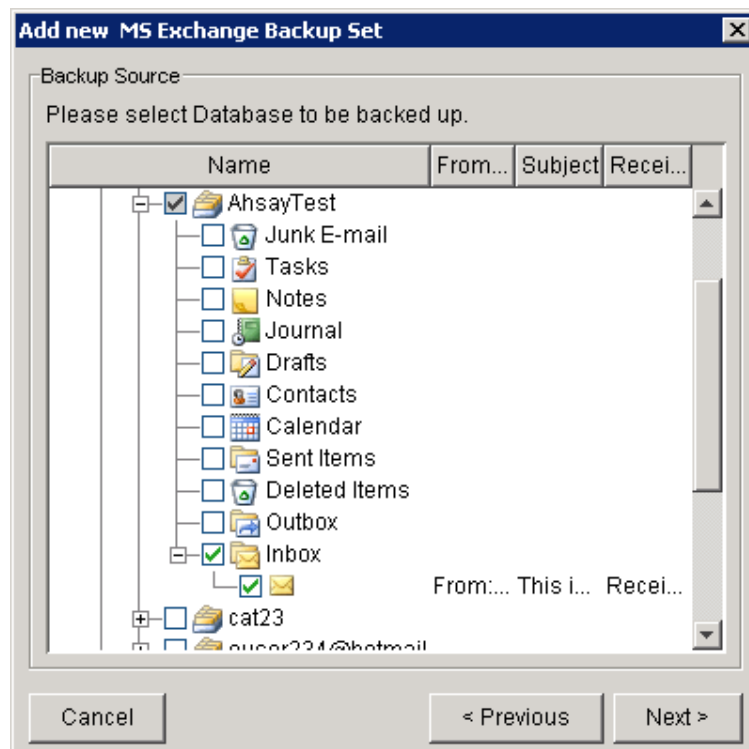


- e) Choose some emails to backup. For example, check the “Inbox” folder to backup each email inside the inbox. Click [next] and follow on screen instructions to finish creating a “MS Exchange Mail Backup Set”.

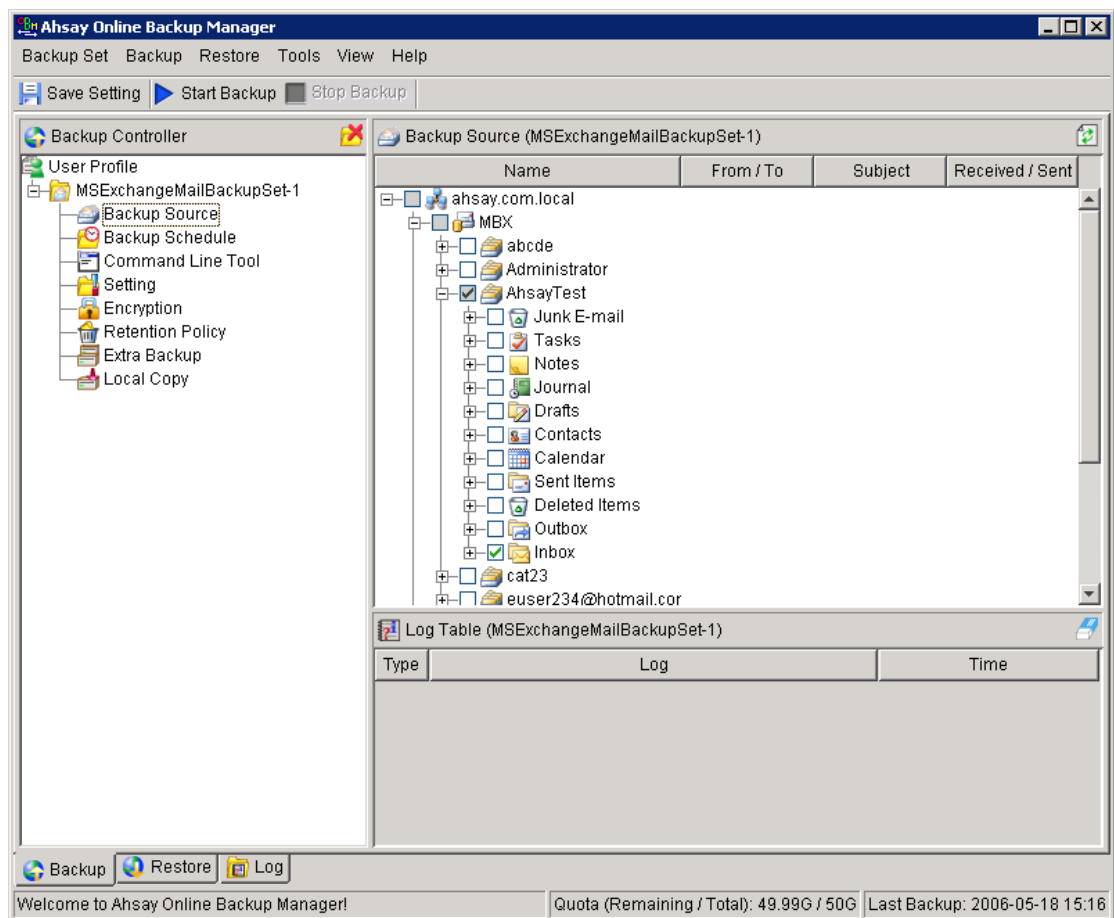

## 2.3 Backup Emails

After the backup set is created, the selected emails can be backed up by running the backup set straight away or wait for the scheduler to start. For example, the email within the inbox from the backup set created above was backed up by running the [Start Backup] command.

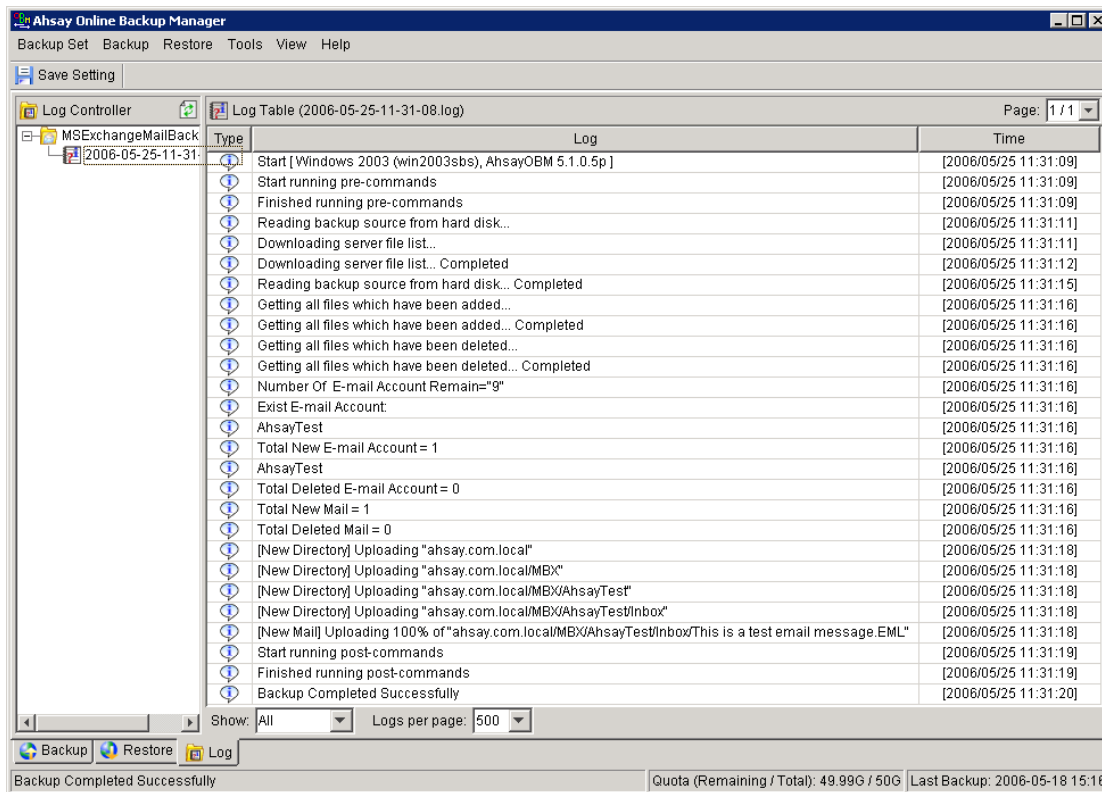

The screenshot shows the Ahsay Online Backup Manager interface. The 'Log Table' window is open, displaying a log for a backup operation on 2006-05-25-11-31-08. The log table has three columns: Type, Log, and Time. The log entries show the progression of the backup, from starting the Windows 2003 (win2003sbs) backup to the final successful completion. The status bar at the bottom indicates 'Backup Completed Successfully' and shows the quota (Remaining / Total): 49.99G / 50G, with the last backup performed on 2006-05-18 15:16.


Type	Log	Time
Start	Start [Windows 2003 (win2003sbs), AhsayOBM 5.1.0.5p]	[2006/05/25 11:31:09]
Start running pre-commands		[2006/05/25 11:31:09]
Finished running pre-commands		[2006/05/25 11:31:09]
Reading backup source from hard disk...		[2006/05/25 11:31:11]
Downloading server file list...		[2006/05/25 11:31:11]
Downloading server file list... Completed		[2006/05/25 11:31:12]
Reading backup source from hard disk... Completed		[2006/05/25 11:31:15]
Getting all files which have been added...		[2006/05/25 11:31:16]
Getting all files which have been added... Completed		[2006/05/25 11:31:16]
Getting all files which have been deleted...		[2006/05/25 11:31:16]
Getting all files which have been deleted... Completed		[2006/05/25 11:31:16]
Number Of E-mail Account Remain="9"		[2006/05/25 11:31:16]
Exist E-mail Account		[2006/05/25 11:31:16]
AhsayTest		[2006/05/25 11:31:16]
Total New E-mail Account = 1		[2006/05/25 11:31:16]
AhsayTest		[2006/05/25 11:31:16]
Total Deleted E-mail Account = 0		[2006/05/25 11:31:16]
Total New Mail = 1		[2006/05/25 11:31:16]
Total Deleted Mail = 0		[2006/05/25 11:31:16]
[New Directory] Uploading "ahsay.com.local"		[2006/05/25 11:31:18]
[New Directory] Uploading "ahsay.com.local/MBX"		[2006/05/25 11:31:18]
[New Directory] Uploading "ahsay.com.local/MBX/AhsayTest"		[2006/05/25 11:31:18]
[New Directory] Uploading "ahsay.com.local/MBX/AhsayTest/Inbox"		[2006/05/25 11:31:18]
[New Mail] Uploading 100% of "ahsay.com.local/MBX/AhsayTest/Inbox/This is a test email message.EML"		[2006/05/25 11:31:18]
Start running post-commands		[2006/05/25 11:31:19]
Finished running post-commands		[2006/05/25 11:31:19]
Backup Completed Successfully		[2006/05/25 11:31:20]






## 2.4 Restore Emails

Assume that the emails in my inbox are accidentally deleted and I want to restore the emails previously backed up.


- a) Firstly, I moved the original email to my Junk E-mail folder to simulate accidentally deleted an important email from my inbox.

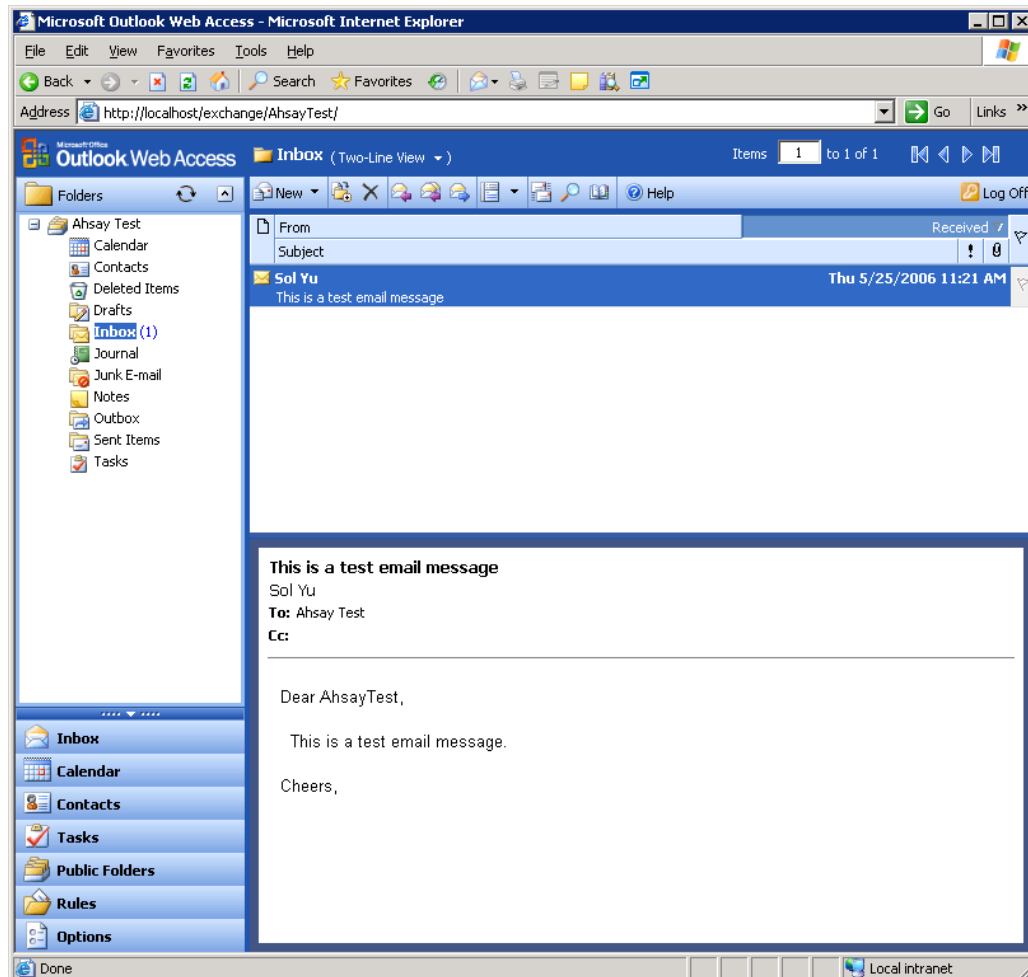

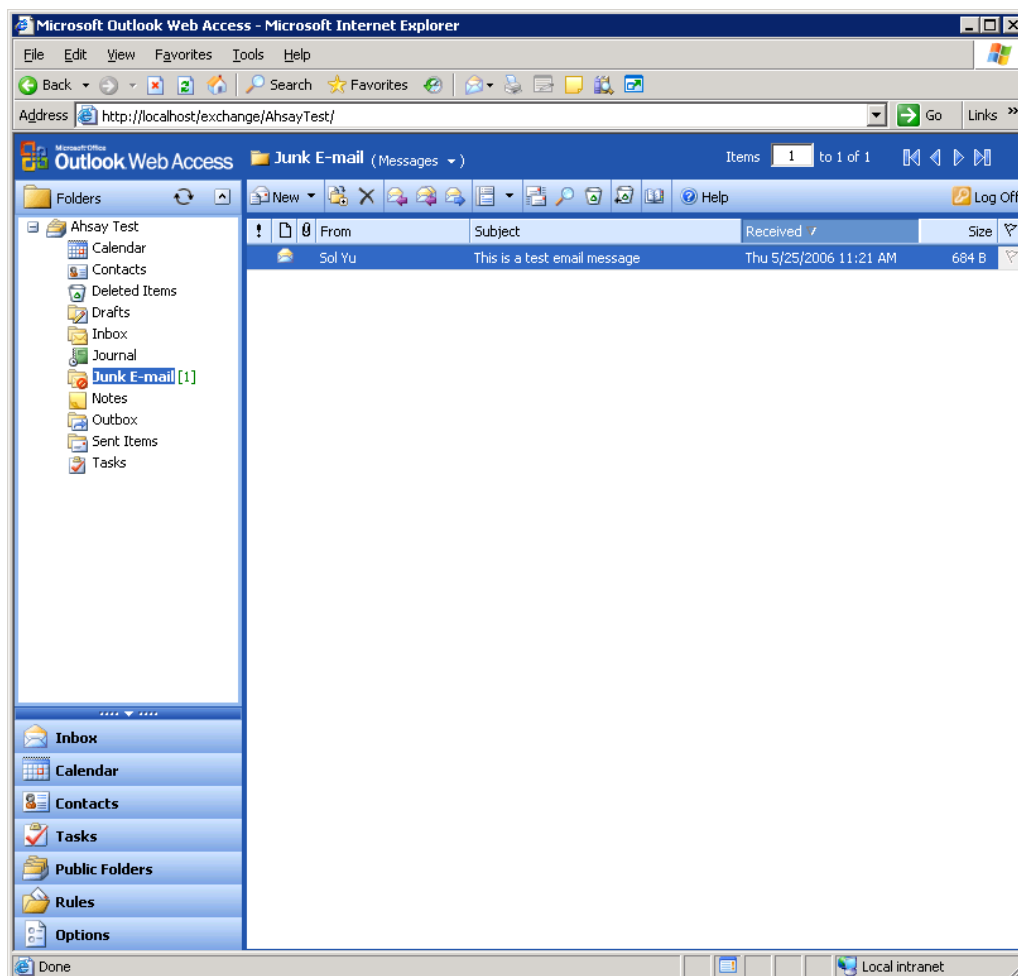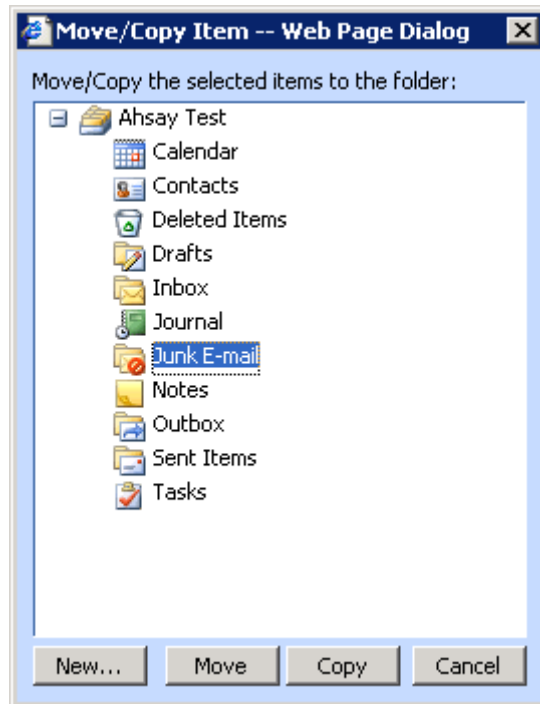


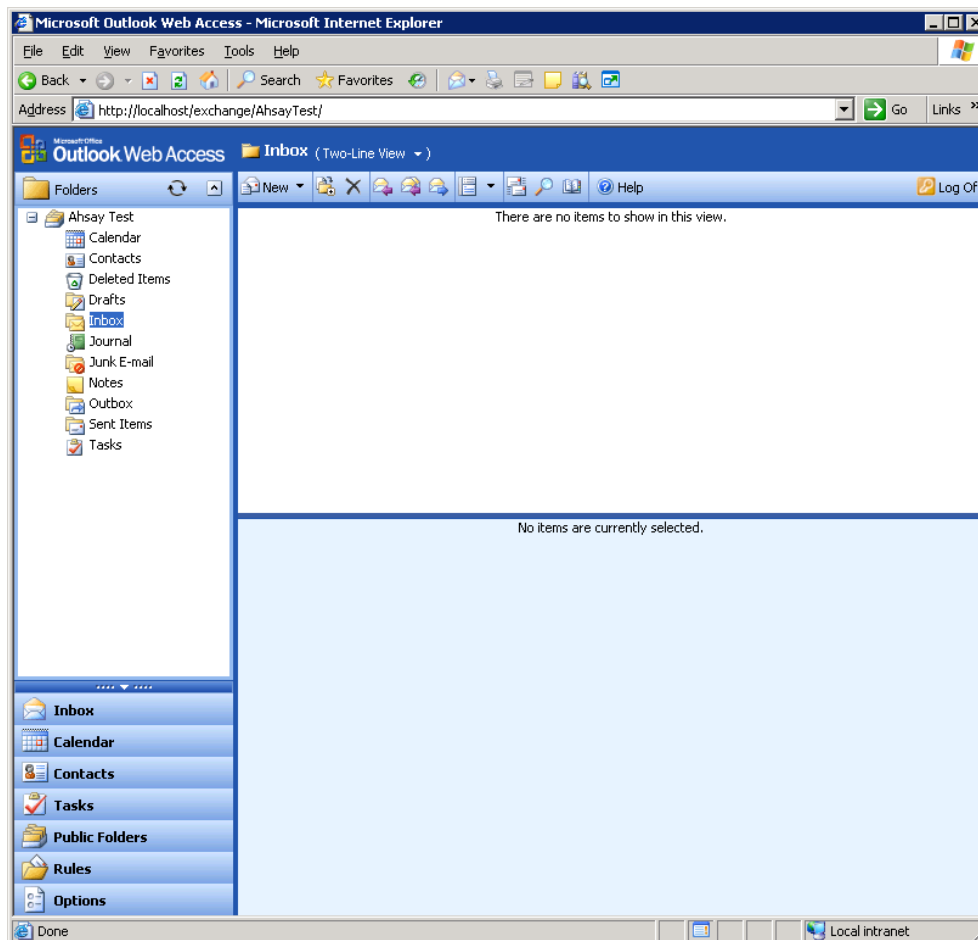


b) From the Restore List, I located the email I want to restore.

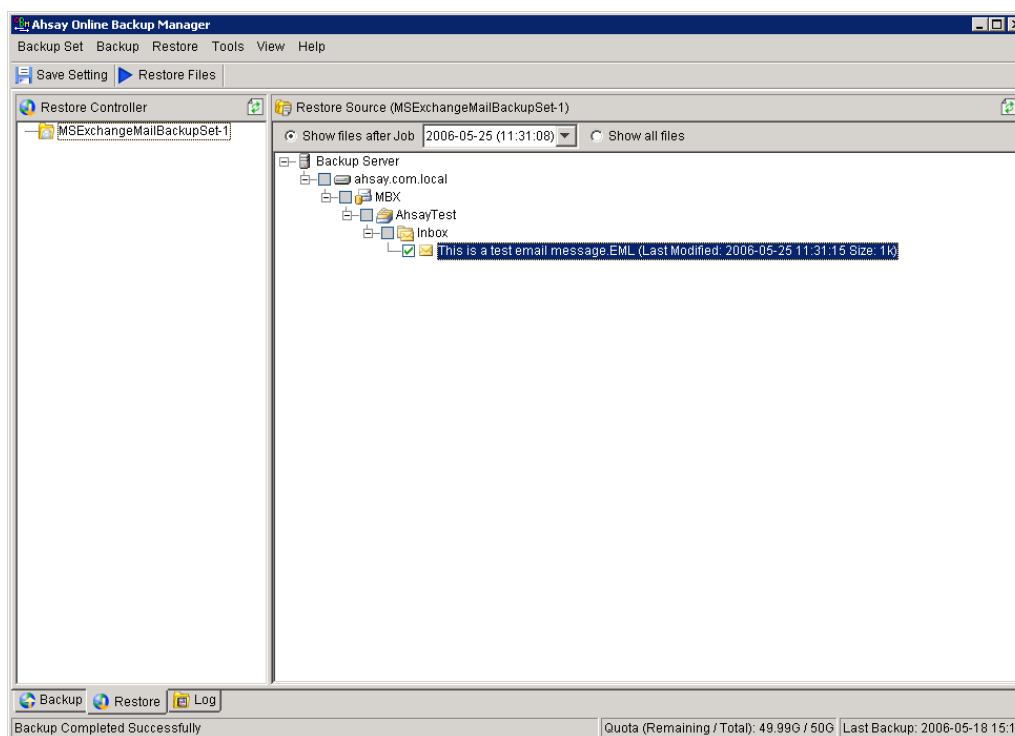

- c) Click [Restore Files]. For security reasons, the email will only be restored to it's original location.

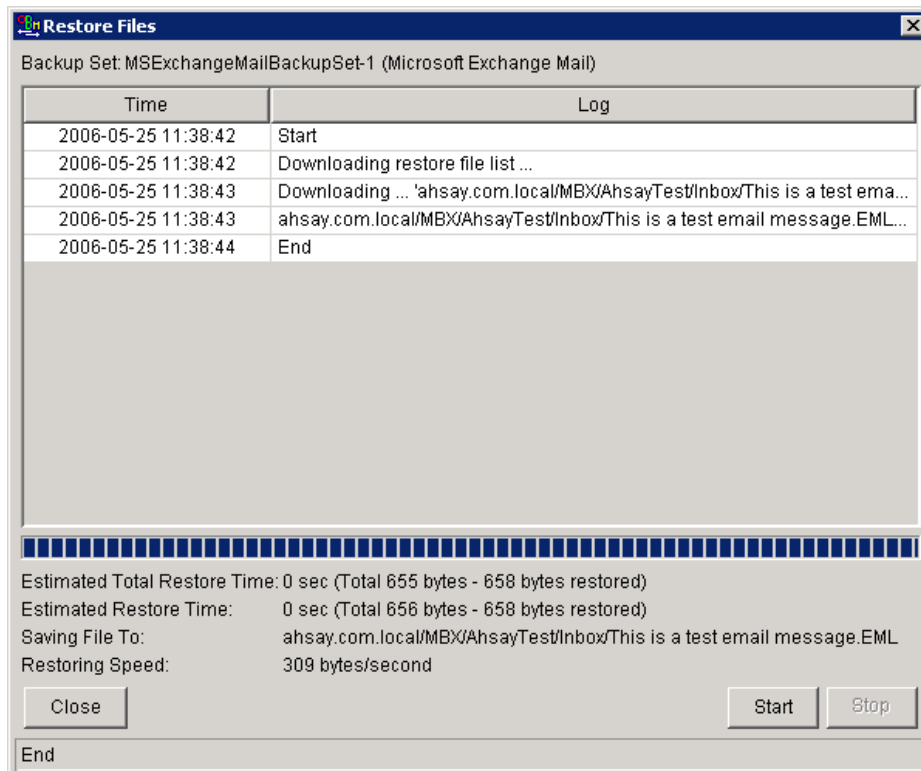

- d) Email restored to my "Inbox"

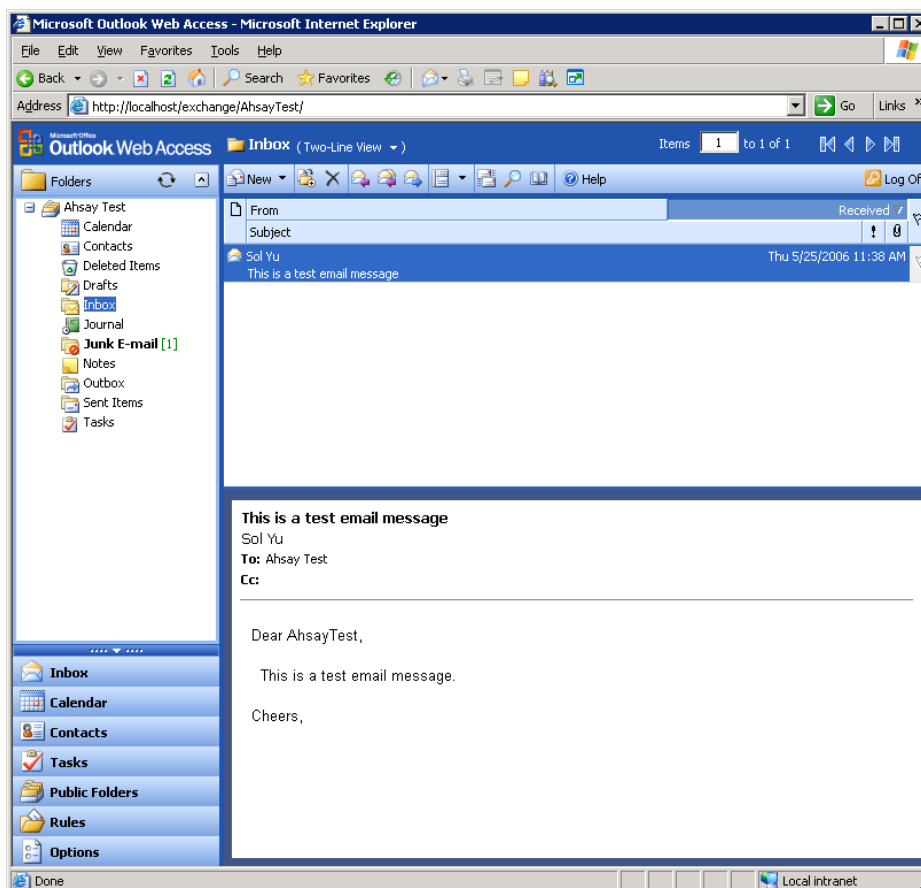

### 3 Work In Progress

This current version only backup and restore individual emails from the exchange server. However, Ahsay is committed to enhance the “Brick-Level Exchange Backup Agent” to provide the following features and should be available soon.

- ◆ Calendar Information
- ◆ Contact Information
- ◆ Tasks
- ◆ Notes
- ◆ Journals
- ◆ Public Folders and Files

### 4 References

- ◆ [http://www.petri.co.il/grant\\_full\\_mailbox\\_rights\\_on\\_exchange\\_2000\\_2003.htm](http://www.petri.co.il/grant_full_mailbox_rights_on_exchange_2000_2003.htm)
- ◆ [http://www.msexchange.org/tutorials/How\\_to\\_get\\_access\\_to\\_all\\_mailboxes\\_in\\_Exchange\\_2000\\_Server.html](http://www.msexchange.org/tutorials/How_to_get_access_to_all_mailboxes_in_Exchange_2000_Server.html)
- ◆ <http://support.microsoft.com/kb/q262054>